




Contact Info: Office: +61 3 9720 9595

Website: insulock.com.au

email: sales@insulock.com.au

A series LS coloured

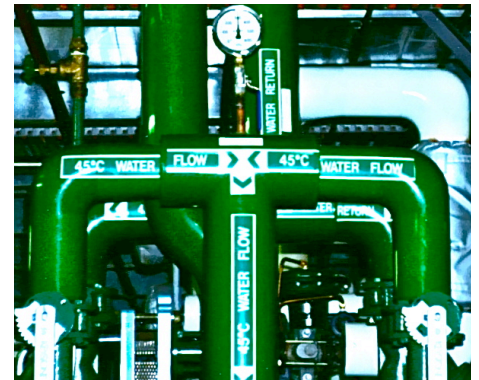

Insulock PVC Cladding is Australia's largest complete system of pre curled jacket and moulded fitting covers to suit all types of rigid pipe insulation sections.

A series modified PVC jacketing for use **indoors only**. Same material as A series regular jacket except for the addition of smoke snuffing ingredients. Bright high-gloss colouring adds a distinct quality appearance as well as offering resistance to fungi and bacteria.

Insulock A series LS coloured PVC cladding is only suitable for indoor use because of fading and puckering from solar heat absorption.

Pre-curved jacketing and fitting covers are available in graduated sizes to suit all sectional insulation types with O.D. 41mm to 558mm and greater as well as one thickness to suit regular duty.

A series LS coloured jacketing is self extinguishing.

Jacket Length: 1.22 metres.

Colour: Please consult factory for available colours.

Insulock jacket	Thickness mm	Weight kg/m ²
A20	0.50	0.73

A20 Standard Jacket

Technical Physical Properties:

Specific Gravity (ASTM D792-91)	1.45
Tensile Strength psi, (ASTM D638-95)	6,000
Tensile Modulus psi, (ASTM D638-95)	381,000
Elongation % (ASTM D638-95)	90.4
Flexural Strength psi, (ASTM D790-95)	8,100
Flexural Modulus psi, (ASTM D790-95)	398,000
Izod Impact 1/4" thick @ 23°C, (ASTM D256-95)	3.7
Heat Deflection Temp °C @ 264psi (ASTM D648-95)	71

The properties represent typical average values in accordance with accepted test methods and are subject to normal manufacturing variations. They are supplied as technical service and are subject to change with out notice. Check with Insulock Pty Ltd office to assure current information. Purchaser will be responsible to determine the suitability of this product for the purchasers use.